THERMALOG
monitor, measure, alert

Temperature Monitoring System

Thermalog

Quick Setup Guide

Move from manual to automated systems

Table of contents

Setting up the hardware 1

Set up the Hub/Stand 1

Set up the Tablet 1

Set up the Dongle 1

Setting up the System 2

Launch Dashboard 2

Set up Admin/ Users 2

How to pair devices 3

Set up Tesen Sensor 3

Set up Wisen Digital Probe 4

Set up Time Buttons 5

Setting up the hardware

Setting up the Hub/Stand

Align the stand and use a screwdriver to tighten the three screws, one by one.

Make sure silicon adhesive (anti-slip) is placed on the base of the stand.

Take out the Hub and slide it into the stand according to the picture.

Setting up the Tablet

Take out the Tablet and place it on the stand according to the picture.

Connect the wire of the Hub to the Tablet.

Take out the adapter and connect the charger to the Tablet using a Type-C cable.

Setting up the Dongle

Take out the dongle and securely attach the external rotatable antenna.

Now, plug the dongle into the Hub according to the picture.

Setting up the System

Launch Dashboard

Turn on the tablet and follow the instructions.

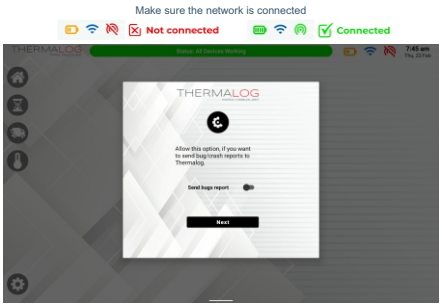

Setup Admin & Users

Follow the stepwise guide to set up the admin by providing the credentials.

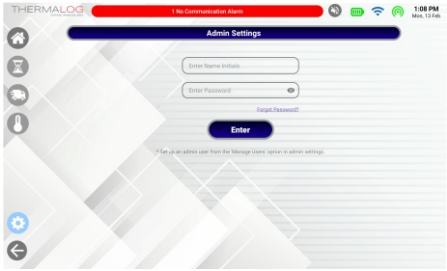

Manager User

Use the “Manage Users” tab to add/remove the users and their respective roles.

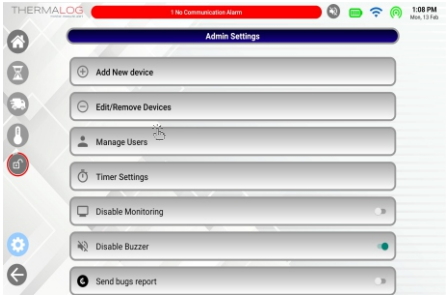

Add User

Select “Add New User” from the dropdown menu and provide complete details.

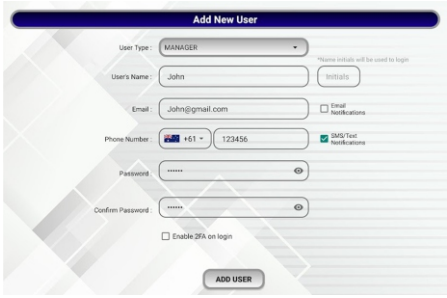

How to pair devices

Setup Tesen Sensor

Turn on Sensor

Turn on the Tesen Sensor by gently pressing the button on the front.

Leave Network

Tesen will leave the network if you press and hold the button for 5 seconds.

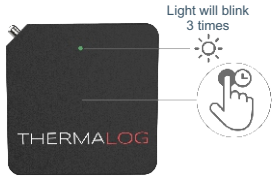

Edit Device

Click on the edit button of the device and update the credentials.

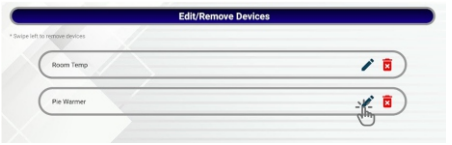

Add New Devices

Log in to the admin account and click on “Add new device”.

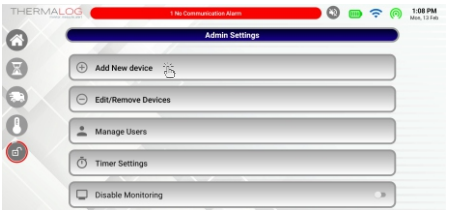

Click on the configure button. Insert the device details and click on “Create Device”.

Remove Device

Click on the “Zigbee Network”. Select “Network Nodes” and remove the device.

How to pair devices

Setup Wisen Probe

Add New Devices

Turn on the Wisen Probe by gently pressing the on/off button.

Click on “add new device” from the dashboard to configure the probe.

Remove Device

Click on the “Zigbee Network”. Select “Network Nodes” and remove the device.

Add Products

Select “Add New Product” to add the product and click the Ok button.

Remove Products

Select “Add New Product” to add the product and click the Ok button.

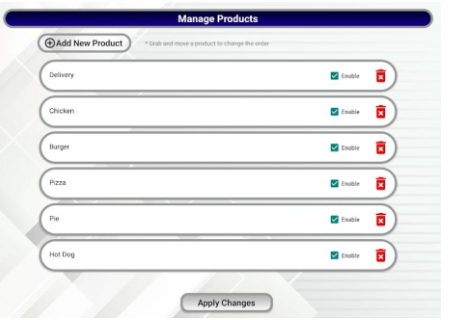

Uncheck the "Enable" box to hide the product from the list of Digital Probe.

How to pair devices

Setup Timer Button

Enable Pairing Mode

Press and hold the bottom-left button to enable pairing mode.

Note: Pairing mode will be enabled when all four buttons start blinking.

Remove Timer

Click on the “Zigbee Network”. Select “Network Nodes” and remove the device.

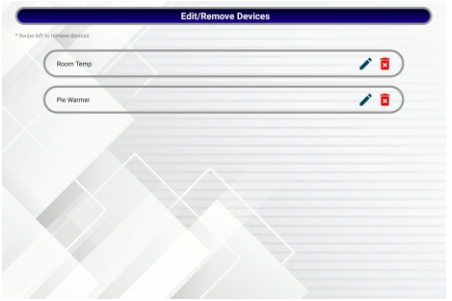

Add Device

Configure the device & follow the process to add the time.

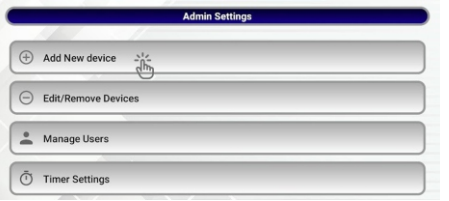

Add/Remove Timer

Use the “timer settings” tab to add/remove or change the timer.

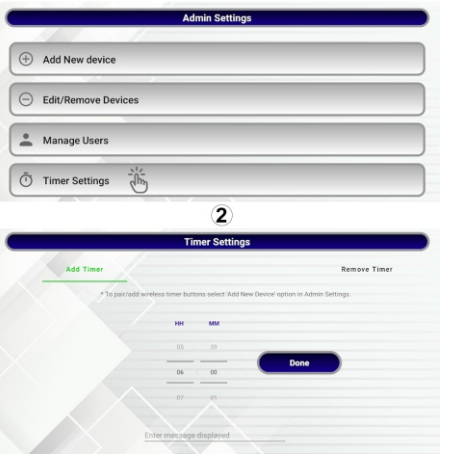

Who we are?

Thermalog's automated and wireless temperature monitoring system makes temperature compliance simple. Our system reduces the costs associated with manual temperature monitoring tasks, helps to improve operational efficiency and provides remote 24/7 monitoring that ensures food safety standards are met.

With Thermalog, businesses save time and money while gaining peace of mind. Get ahead of the competition and ensure temperature compliance with Thermalog's automated temperature monitoring system.

Contact us

Do you have a question about a product, service or solution? Leave us a message, and we will get back to you.

Whatsapp +61 414 256 103

Email: info@thermalog.com.au

Web: www.thermalog.com.au
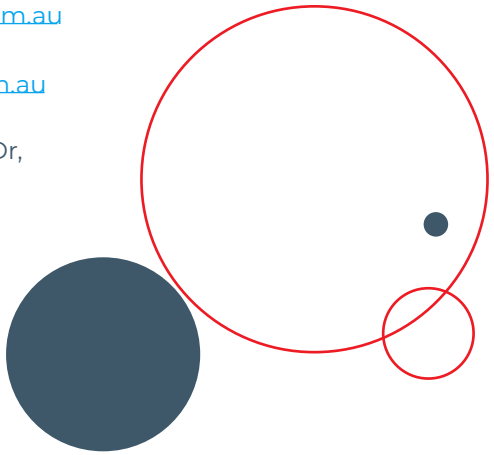
Address: 16 Honeysuckle Dr,
Newcastle 2300,
NSW, Australia.